


# 發泡、充實聚乙烯雙層絕緣充膠積層被覆市內(自持)電纜 FS-JF-LAP(-SS)

## 特性及應用:

- 自持型發泡、充實聚乙烯雙層絕緣(Form-Skin)星絞型(Star quad)、充膠(Jill filled)積層聚乙烯被覆簇型市內電纜
- 適用於市內電信之地下線路或架空線路
- 優良之防水特性，氣密性佳、抗蝕性強、絕緣性良好、壽命長

## 構造:

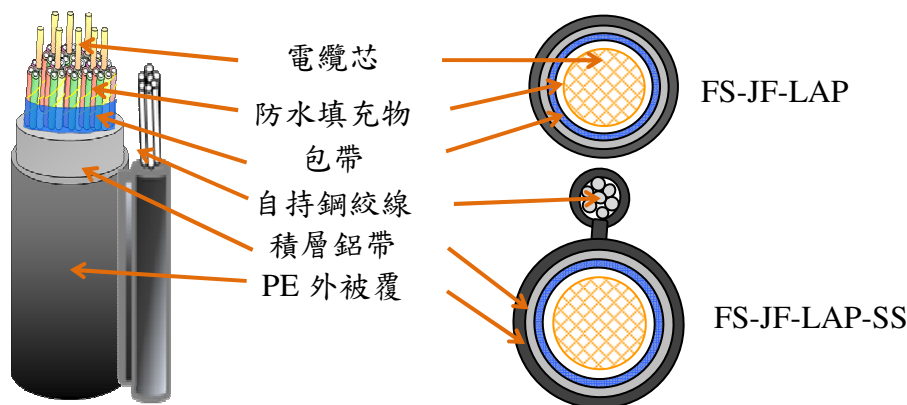

## 尺寸規格:

線徑 (mm)			0.4								0.5									
對數 (P)			10	20	30	50	100	200	300	400	600	10	20	30	50	100	200	300	400	600
絕緣厚度 (mm)			0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
積層被覆厚度 (mm)			1.7	1.7	1.7	1.7	1.7	1.7	1.9	2.0	2.2	1.7	1.7	1.7	1.7	1.7	1.8	2.0	2.1	2.3
完成電纜	外徑(約)	(mm)	9	11	12	14	17	23	28	33	39	10	12	14	16	21	27	34	39	45
	重量(約)	(kg/m)	0.09	0.13	0.18	0.25	0.44	0.80	1.15	1.60	2.27	0.11	0.18	0.24	0.35	0.63	1.16	1.67	2.30	3.20
自持型電纜	連接體	(寬 x 高) (mm)	2x2	2x2	2x2	2x2	2x2	2x2	—	—	—	2x2	2x2	2x2	2x2	2x2	3x3	—	—	—
	鍍鋅鋼絞線	股數/線徑	7/1.8	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	—	—	—	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	—	—	—
		被覆厚度	1.0	1.0	1.0	1.0	1.0	1.0	—	—	—	1.0	1.0	1.0	1.0	1.0	1.2	—	—	—
	外徑(約)	(mm)	9x18	11x20	12x21	14x23	17x27	23x33	—	—	—	10x19	12x21	13x23	16x26	20x30	27x40	—	—	—
重量(約)	(kg/m)	0.25	0.29	0.33	0.41	0.59	0.97	—	—	—	0.27	0.33	0.39	0.51	0.8	1.40	—	—	—	
標準長度 (M)			500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
線徑 (mm)			0.65																	
對數 (P)			10	20	30	50	100	200	300	400	600									
絕緣厚度 (mm)			0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20									
積層被覆厚度 (mm)			1.7	1.7	1.7	1.7	1.8	2.0	2.2	2.3	2.6									
完成電纜	外徑(約)	(mm)	12	15	17	20	27	36	42	48	57									
	重量(約)	(kg/m)	0.16	0.28	0.36	0.54	1.00	1.85	2.76	3.80	5.40									
自持型電纜	連接體	(寬 x 高) (mm)	2x2	2x2	2x2	2x2	3x3	3x3	—	—	—									
	鍍鋅鋼絞線	股數/線徑	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	7/2.3	—	—	—									
		被覆厚度	1.0	1.0	1.0	1.0	1.2	1.2	—	—	—									
	外徑(約)	(mm)	11x21	14x24	16x26	19x29	26x38	34x48	—	—	—									
重量(約)	(kg/m)	0.32	0.42	0.51	0.73	1.26	2.22	—	—	—										
標準長度 (M)			500	500	500	500	500	500	500	500	345									