


R*-SB

自融性漆包銅線

Self-Bonding Enamelled Copper Wire

耐溫等級：130°C~220°C

Thermal Rating: Class 130°C ~ Class 220°C

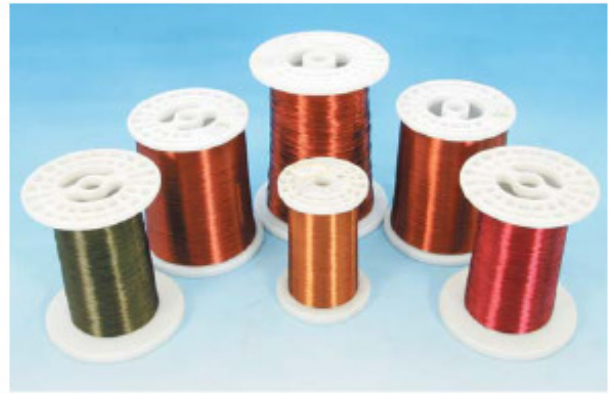

● R*表示各種類型合成絕緣樹脂。

絕緣說明：

● R*-SB其組成依不同應用場合，有多種不同絕緣線材的選擇。絕緣層可選擇UEW、PEW、EIW、SEIW、EAIW、AIW，自融層則有溶劑融著及加熱融著。

● 其產品名稱標示有：UEW+SB PEW+SB EIW+SB SEIB EAIB AIW+SB。

特性：

- (a)線圈可因融著層定型，可免含浸定型手續。
- (b)具有良好繞線特性，能承受高速自動繞線之作業。

應用範圍：

● 自撐型線圈、電感器、音圈、偏向線圈、馬達、蝶形線圈、環型線圈。

● R*:Any available enamelled wire coated with organic film insulation.

Insulation Description

● R*-SB describes a number of possible constructions of bondable wire, having UEW / PEW / EIW / SEIW / EAIW / AIW base insulation with a thermoplastic bondcoat which may be activated by heat or solvent. The insulation material could be changed to meet different applications.

Trade Names

● UEW+SB, PEW+SB, EIW+SB, SEIB, EAIB, AIW+SB.

Features and Benefits

- (a)Replaces varnish to set coils.
- (b)Solvent or heat-activated bondcoat.
- (c)Excellent dereeling and windability on high speed and automated winding machines.

Typical Application

● Self-supporting coils, Inductors voice coils, Yoke coils, Solenoid coils, Motor field coils.

供應線徑範圍：可依客戶需求設計產製

公制(mm)	AWG SIZE
2.20~0.10	12-38

Applicable Specifications:

METRIC(mm)	AWG SIZE
2.20~0.10	12-38