


69kV 級交連 PE 絕緣及 PE 被覆防蟻電纜規格書



公稱 截面積	導 體		半導 電帶 層 厚度	導體 遮蔽層 厚度	絕緣體 厚度	絕緣體 外徑 (di)	絕緣體 遮蔽層 厚度	半導 電帶 層 厚度	銅 線 遮 蔽		繃紮帶 厚度	防蟻層 厚 度	PE 被覆 厚度	完 成 外 徑 (D) (誤差 +2.5 -1.5)	導體 最大 直流 電阻 (20°C)	絕緣 電阻 (15.6°C)	靜電 容 量	交 流 耐電壓	直 流 耐電壓	
	形 狀	外 徑 (dc)							單 位 重 量	Avg.										Avg.
mm ²	---	mm	Kg/km	mm	mm	mm	mm	mm	mm	No.	mm	mm	mm	mm	Ω/km	MΩ.km	uF/kM	kV/Min.	kV/Min.	
100	壓縮 圓形	12.0±0.2	908	0.25	0.76	16.51	1.27	0.25	65	1.4	0.25	1.5	3.5	66.0	0.187	3000	0.13	130±3% / 5Min.	260±3% / 15Min.	
150		14.7±0.2	1390											68.5	0.124	2700	0.14			
200		17.0±0.3	1776											71.0	0.0933	2500	0.15			
250		19.0±0.3	2298											73.5	0.0754	2300	0.16			
325		21.7±0.3	2937											76.5	0.058	2200	0.17			
400		24.1±0.3	3654											79.0	0.0471	2000	0.18			
500		26.6±0.3	4448										4.0	82.5	0.0376	1900	0.19			
600		29.5±0.5	5466											85.5	0.0308	1800	0.21			
800		34.0±0.5	7100											4.5	91.5	0.0231	1600			0.23
1000		38.0±0.5	8772												95.0	0.0187	1500			0.25
1200	41.7±0.5	10512	99.5	0.0156	1400	0.26														
1400	45.0±0.7	12332	102.5	0.0133	1300	0.28														
1600	48.2±0.7	14020	106.0	0.0117	1200	0.29														

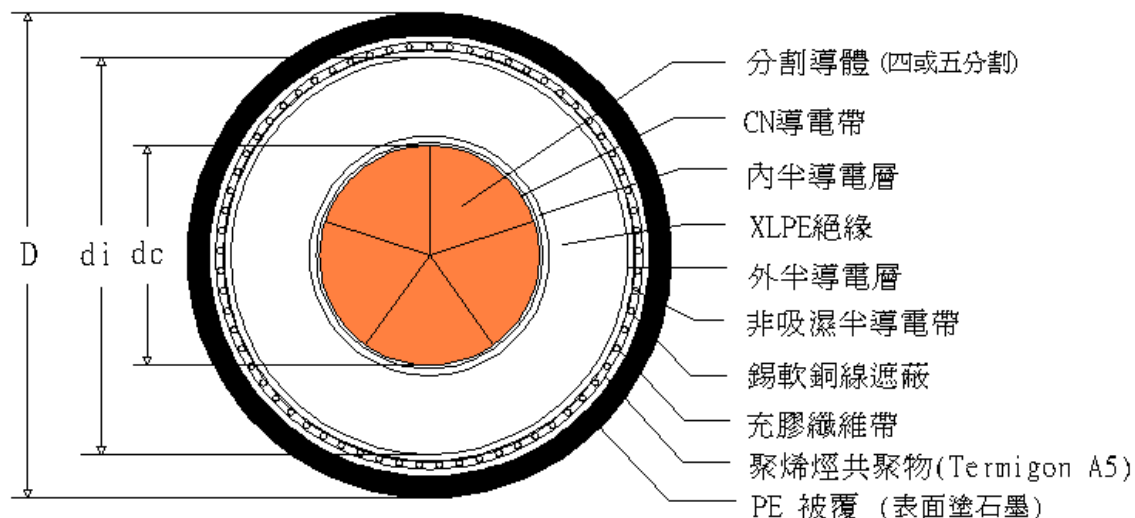

大亞集團

大亞電線電纜股份有限公司

大亞電線電纜

Ta Ya Electric Wire & Cable Co., Ltd.