


Single Slotted Ribbon Type LAP PE Sheathed Optical Cable (4-fiber ribbon)

Properties & application:

- ④ The optical performance complied with ITU-T G.652D
- ④ Suitable for 1260~1625nm transmission wavelength
- ④ Fiber count(C): 4C~300C
- ④ Water-resistant
- ④ Suitable for subscriber, metropolitan and long haul Network
- ④ The outer sheath can be adapted to flame-retardant (FR) PE material

Structure:

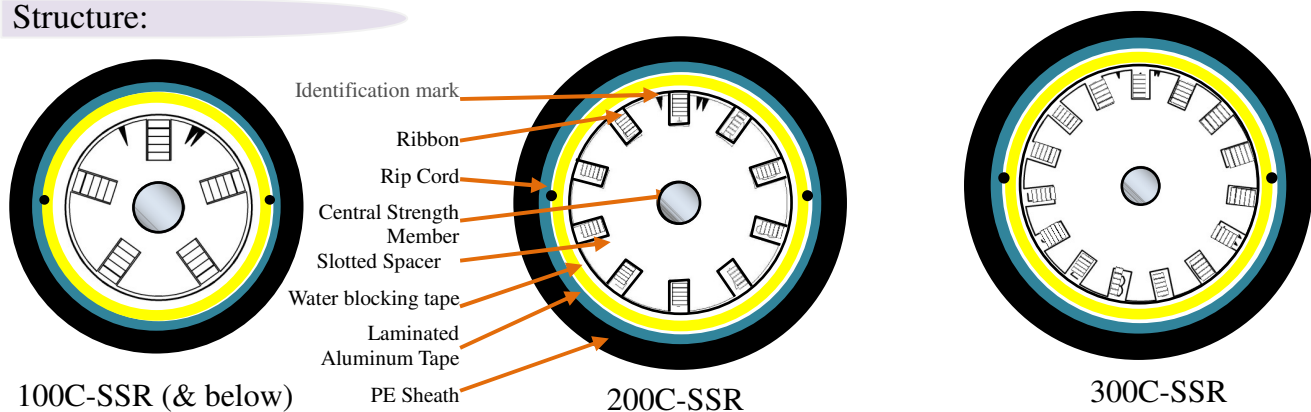

Dimension:

Fiber count(C)	Amount 4-fiber ribbon	Diameter of cable core (Approx.)(mm)	Laminated sheath standard thickness (mm)	Overall dia. of optical cable (Approx.)(mm)	Weight (Approx.)(Kg/m)
4	1	10	1.7	14	0.12
8	2	10	1.7	14	0.12
12	3	10	1.7	14	0.12
16	4	10	1.7	14	0.12
24	6	10	1.7	14	0.12
48	12	10	1.7	14	0.12
72	18	10	1.7	14	0.12
100	25	10	1.7	14	0.12
200	50	15	2.0	19	0.25
300	75	17	2.0	21	0.33