


耐熱電線電纜(HR-CV):

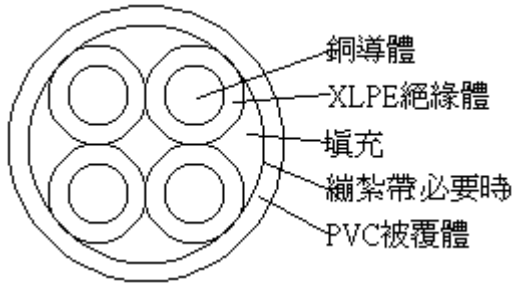

電纜構造:

- 導體：軟銅單線或軟銅絞線
- 絕緣：交連聚乙烯(XLPE)材質
- 絞合：(多芯適用)
- 繃紮帶：必要時
- 被覆：聚氯乙烯(PVC)材質

參考規範: 消防署--耐熱電線電纜認可基準

耐熱電線電纜(HR-CV)

標稱電壓：600V 以下使用範圍

芯數	導體			絕緣厚度 mm	被覆厚度 mm	最導體電阻 Ω/km (20°C)	試驗電壓 kV/分	最絕緣電阻 MΩ.km (20°C)	完成外徑 mm (約)	芯數	導體			絕緣厚度 mm	被覆厚度 mm	最導體電阻 Ω/km (20°C)	試驗電壓 kV/分	最絕緣電阻 MΩ.km (20°C)	完成外徑 mm (約)
	規格	構成	外徑 mm								規格	構成	外徑 mm						
1	0.65 mm	1/0.65	0.65	0.4	0.8	53.0	1.5/1	50	3.1	1	1.6 mm	1/1.6	1.6	0.5	0.8	9.01	1.5/1	50	4.2
2					1.0	53.0			4.9	2					1.0	9.01			7.2
3					1.0	53.0			5.1	3					1.0	9.01			7.6
4					1.0	53.0			5.5	4					1.0	9.01			8.3
7					1.0	53.0			6.4	7					1.0	9.01			9.8
10					1.0	53.0			7.8	10					1.0	9.01			12.4
12					1.0	53.0			8.0	12					1.0	9.01			12.8
24	1.0	53.0	10.7	24	1.0	9.01	18.2												
30	1.0	53.0	11.3	30	1.0	9.01	19.3												
1	0.9 mm	1/0.9	0.9	0.4	0.8	28.5	1.5/1	50	3.3	1	2.0 mm	1/2.0	2.0	0.5	0.8	5.77	1.5/1	50	4.6
2					1.0	28.5			5.4	2					1.0	5.77			8.0
3					1.0	28.5			5.7	3					1.0	5.77			8.5
4					1.0	28.5			6.1	4					1.0	5.77			9.2
7					1.0	28.5			7.1	7					1.0	5.77			11.0
10					1.0	28.5			8.8	10					1.0	5.77			14.0
12					1.0	28.5			9.1	12					1.0	5.77			14.5
24	1.0	28.5	12.2	24	1.0	5.77	20.6												
30	1.0	28.5	12.9	30	1.0	5.77	21.8												
1	1.0 mm	1/1.0	1.0	0.5	0.8	23.1	1.5/1	50	3.6	1	1.25 mm ²	7/0.45	1.35	0.5	0.8	16.8	1.5/1	50	4.0
2					1.0	23.1			6.0	2					1.0	16.8			6.7
3					1.0	23.1			6.3	3					1.0	16.8			7.1
4					1.0	23.1			6.8	4					1.0	16.8			7.7
7					1.0	23.1			8.0	7					1.0	16.8			9.1
10					1.0	23.1			10.0	10					1.0	16.8			11.4
12					1.0	23.1			10.3	12					1.0	16.8			11.8
24	1.0	23.1	14.0	24	1.1	16.8	16.3												
30	1.1	23.1	15.0	30	1.1	16.8	17.3												
1	1.2 mm	1/1.2	1.2	0.5	0.8	16.0	1.5/1	50	3.8	1	2 mm ²	7/0.6	1.8	0.5	0.8	9.43	1.5/1	50	4.4
2					1.0	16.0			6.4	2					1.0	9.43			7.6
3					1.0	16.0			6.7	3					1.0	9.43			8.0
4					1.0	16.0			7.3	4					1.0	9.43			8.8
7					1.0	16.0			8.6	7					1.0	9.43			10.4
10					1.0	16.0			10.8	10					1.1	9.43			13.2
12					1.0	16.0			11.1	12					1.1	9.43			13.6
24	1.1	16.0	15.2	24	1.3	9.43	19.4												
30	1.1	16.0	16.3	30	1.4	9.43	20.6												

註:如有爭議悉以消防署耐熱電線電纜認可基準為準



大亞集團

大亞電線電纜

大亞電線電纜股份有限公司

Ta Ya Electric Wire & Cable Co.,Ltd.