


Polyethylene Insulated Polyvinyl Chloride Sheathed Indoor Cable (PE-PVC)

Properties & application:

- PE insulation, PVC sheathed star quad copper cables.
- High flexibility, handy for construction.
- Flame insensitive, suitable for indoor application.

Structure:

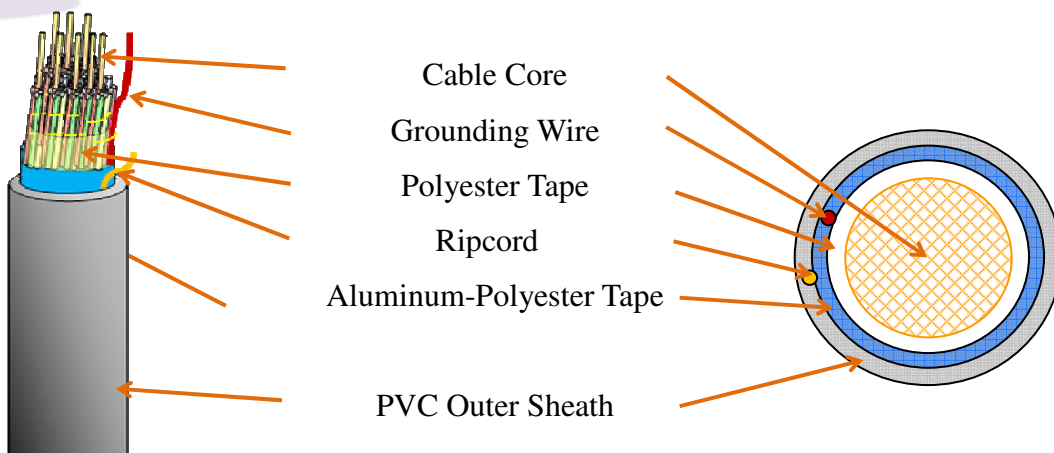

Dimension:

PE-PVC

Copper wire dia. (mm)	pairs (P)	PE insulation standard thickness (mm)	Cable core dia. (approx.) (mm)	PVC sheath standard thickness (mm)	Overall dia. (approx.) (mm)	Weight (approx.) (kg/km)	Standard length (m)
0.4	6	0.13	3.4	1.2	5.8	45	500
	10	0.13	4.4	1.2	6.8	62	500
	20	0.13	6.0	1.2	8.4	98	500
	30	0.13	7.3	1.2	9.7	133	500
	50	0.13	9.4	1.3	12.0	204	500
	100	0.13	13.1	1.5	16.1	376	500
	200	0.13	18.4	1.8	22.0	713	500
	300	0.13	22.7	1.8	26.3	1027	500
	400	0.13	26.1	2.1	30.3	1369	500
	600	0.13	31.9	2.2	36.3	1986	500
0.5	6	0.15	4.1	1.2	6.5	54	500
	10	0.15	5.2	1.2	7.6	81	500
	20	0.15	7.2	1.2	9.6	134	500
	30	0.15	8.7	1.2	11.1	184	500
	50	0.15	11.2	1.3	13.8	288	500
	100	0.15	15.7	1.5	18.7	539	500
	200	0.15	22.1	1.8	25.7	1033	500
	300	0.15	27.3	1.9	31.1	1515	500
	400	0.15	31.4	2.2	35.8	2017	500
	600	0.15	38.4	2.3	43.0	2943	500