


# 彩色聚乙烯絕緣積層鋁帶聚乙烯被覆市內(自持)電纜 CCP-LAP(-SS)

## 特性及應用:

- ① 圓型及自持型彩色聚乙烯絕緣(Colour Code PE)星絞型(Star quad)、積層聚乙烯被覆簇型市內電纜
- ② 隔熱帶包捲及積層鋁帶遮蔽, 其耐磨、耐天候及可撓度均佳
- ③ 適用於市內配線、幹線線路或架空型線路
- ④ 易於施工處理

## 構造:

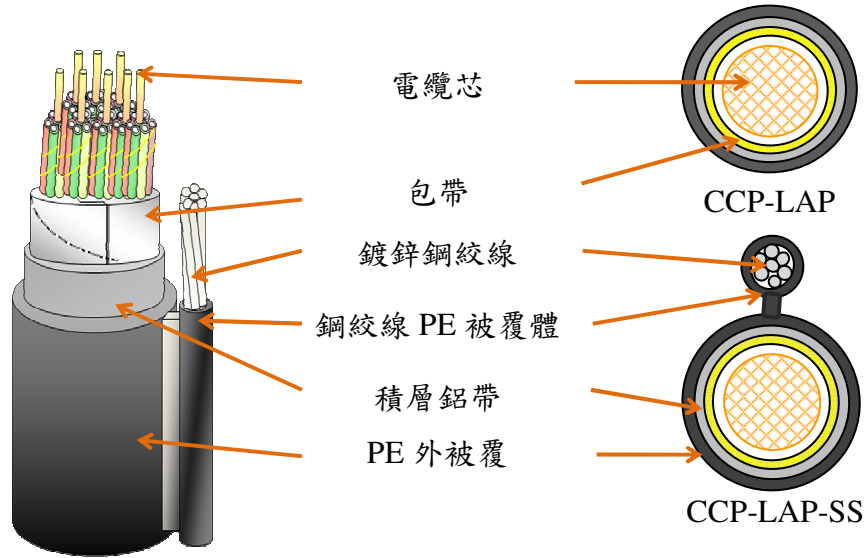

## 尺寸規格:

線徑		mm	0.4									0.5									
對數		P	10	20	30	50	100	200	300	400	600	10	20	30	50	100	200	300	400	600	
PE 絕緣厚度		mm	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	
電纜芯徑(約)		mm	5	8	9	10	14	20	25	30	35	6	9	11	12	17	23	30	36	42	
LAP 被覆厚度		mm	1.7	1.7	1.7	1.7	1.7	1.7	1.9	2.0	2.1	1.7	1.7	1.7	1.7	1.7	1.8	2.0	2.1	2.3	
圓形電纜	完成外徑(約)	mm	10	12	13	15	18	24	29	35	39	11	13	15	17	22	28	35	40	52	
	重量(約)	kg/km	95	130	180	250	420	750	1135	1435	2060	110	165	240	340	600	1080	1700	2090	3065	
自持型電纜	連接體 (寬 x 高)		mm	2x2	2x2	2x2	2x2	2x2	2x2	—	—	2x2	2x2	2x2	2x2	2x2	3x3	—	—	—	
	鍍鋅鋼絞線	股數/線徑	No./mm	7/1.8	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	—	—	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	—	—	—	
		被覆厚度	mm	1.0	1.0	1.0	1.0	1.0	1.0	—	—	—	1.0	1.0	1.0	1.0	1.0	1.2	—	—	—
	完成外徑(約)		mm	10x20	12x22	13x23	15x25	18x28	24x35	—	—	—	11x21	13x23	15x25	17x27	22x32	28x40	—	—	—
	重量(約)		kg/km	270	305	360	435	600	960	—	—	—	185	245	420	515	810	1370	—	—	—
標準長度		m	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	
線徑		mm	0.65									0.9									
對數		P	10	20	30	50	100	200	300	400	600	10	20	30	50	100					
PE 絕緣厚度		mm	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.27	0.27	0.27	0.27	0.27					
電纜芯徑(約)		mm	7	11	13	15	21	29	36	42	50	10	14	17	21	30					
LAP 被覆厚度		mm	1.7	1.7	1.7	1.7	1.8	2.0	2.2	2.3	2.6	1.7	1.7	1.7	1.8	2.0					
圓形電纜	完成外徑(約)	mm	12	15	17	21	27	36	41	50	56	15	18	23	27	36					
	重量(約)	kg/km	150	240	340	510	930	1740	2600	3350	4950	240	390	530	900	1670					
自持型電纜	連接體 (寬 x 高)		mm	2x2	2x2	2x2	2x2	3x3	—	—	—	2x2	2x2	2x2	3x3	—					
	鍍鋅鋼絞線	股數/線徑	No./mm	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	—	—	—	7/1.8	7/1.8	7/2.0	7/2.3	—					
		被覆厚度	mm	1.0	1.0	1.0	1.0	1.2	—	—	—	—	1.0	1.0	1.0	1.2	—				
	完成外徑(約)		mm	12x22	15x25	17x27	21x31	27x39	—	—	—	—	15x24	18x28	23x33	27x39	—				
	重量(約)		kg/km	330	420	520	720	1220	—	—	—	—	420	600	790	1185	—				
標準長度		m	500	500	500	500	500	500	345	345	345	500	500	500	500	500					