


發泡、充實聚乙烯雙層絕緣充膠積層被覆市內(自持)電纜 FS-JF-LAP(-SS)

特性及應用:

- 自持型發泡、充實聚乙烯雙層絕緣(Form-Skin)星絞型(Star quad)、充膠(Jill filled)積層聚乙烯被覆簇型市內電纜
- 適用於市內電信之地下線路或架空線路
- 優良之防水特性，氣密性佳、抗蝕性強、絕緣性良好、壽命長
- 符合 CNS13647-C2174 及中華電信材線 1102、1109 規範

構造:

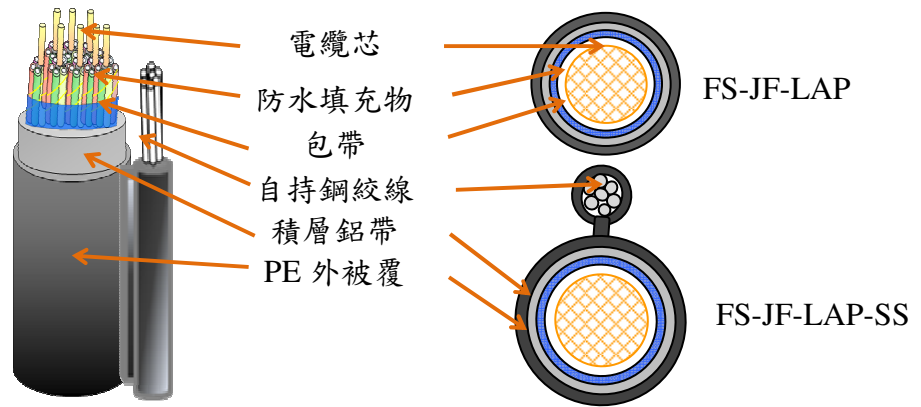

尺寸規格:

線徑 (mm)			0.4								0.5									
對數 (P)			10	20	30	50	100	200	300	400	600	10	20	30	50	100	200	300	400	600
絕緣厚度 (mm)			0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
積層被覆厚度 (mm)			1.7	1.7	1.7	1.7	1.7	1.7	1.9	2.0	2.2	1.7	1.7	1.7	1.7	1.7	1.8	2.0	2.1	2.3
完成電纜	外徑(約)	(mm)	9	10.6	11.9	14	17.5	22.7	27.2	30.6	36.8	9.7	11.6	13	15.7	19.9	26.5	31.7	35.9	43.1
	重量(約)	(kg/m)	0.09	0.13	0.18	0.25	0.44	0.80	1.15	1.60	2.27	0.11	0.18	0.24	0.35	0.63	1.16	1.67	2.30	3.20
自持型電纜	連接體	(寬 x 高)	2x2	2x2	2x2	2x2	2x2	2x2	—	—	—	2x2	2x2	2x2	2x2	2x2	3x3	—	—	—
		(mm)																		
	鍍鋅鋼絞線	股數/線徑	7/1.8	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	—	—	—	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	—	—	—
		被覆厚度	1.0	1.0	1.0	1.0	1.0	1.0	—	—	—	1.0	1.0	1.0	1.0	1.0	1.2	—	—	—
外徑(約)	(mm)	9x18	10.6x20	11.9x21	14x23	17.5x27	22.7x33	—	—	—	9.7x19	11.6x21	13x23	15.7x26	19.9x30	26.5x40	—	—	—	
	(kg/m)	0.25	0.29	0.33	0.41	0.59	0.97	—	—	—	0.27	0.33	0.39	0.51	0.8	1.40	—	—	—	
標準長度 (M)			500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
線徑 (mm)			0.65																	
對數 (P)			10	20	30	50	100	200	300	400	600									
絕緣厚度 (mm)			0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20									
積層被覆厚度 (mm)			1.7	1.7	1.7	1.7	1.8	2.0	2.2	2.3	2.6									
完成電纜	外徑(約)	(mm)	11.5	14	16.1	19.3	25.5	34.5	40.6	46.3	56.1									
	重量(約)	(kg/m)	0.16	0.28	0.36	0.54	1.00	1.85	2.76	3.80	5.40									
自持型電纜	連接體	(寬 x 高)	2x2	2x2	2x2	2x2	3x3	3x3	—	—	—									
		(mm)																		
	鍍鋅鋼絞線	股數/線徑	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	7/2.3	—	—	—									
		被覆厚度	1.0	1.0	1.0	1.0	1.2	1.2	—	—	—									
外徑(約)	(mm)	11.5x24	14x26	16.1x29	19.3x38	25.5x48	34.5x48	—	—	—										
	(kg/m)	0.32	0.42	0.51	0.73	1.26	2.22	—	—	—										
標準長度 (M)			500	500	500	500	500	500	500	345										