


Foam Skin Polyethylene Insulated Jelly Filled Laminated Aluminum With Messenger Wire Sheathed Local Cable (FS-JF-LAP-SS)

Properties & application:

- Applied for underground local telephone network, and aerial application.
- Preventing from etching、excellent insulation resistant and water proofing、last long

Structure:

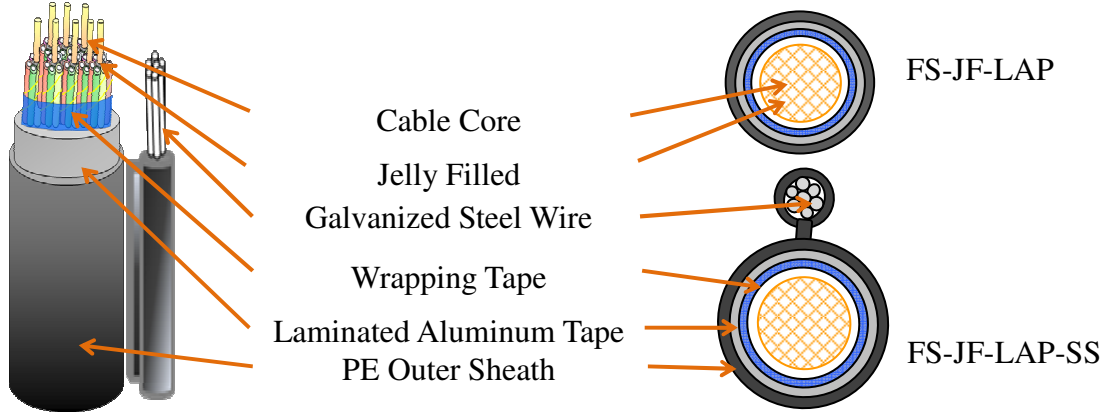

Dimension:

Copper wire dia.(mm)			0.4								0.5										
pairs (P)			10	20	30	50	100	200	300	400	600	10	20	30	50	100	200	300	400	600	
insulation thickness (mm)			0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	
LAP sheath thickness (mm)			1.7	1.7	1.7	1.7	1.7	1.7	1.9	2.0	2.2	1.7	1.7	1.7	1.7	1.7	1.8	2.0	2.1	2.3	
Overall dia. (Approx.)(mm)			9	10.6	11.9	14	17.5	22.7	27.2	30.6	36.8	9.7	11.6	13	15.7	19.9	26.5	31.7	35.9	43.1	
weight(kg/m)			0.09	0.13	0.18	0.25	0.44	0.80	1.15	1.60	2.27	0.11	0.18	0.24	0.35	0.63	1.16	1.67	2.30	3.20	
Self-support cable	web	(wide x height) (mm)	2x2	2x2	2x2	2x2	2x2	2x2	—	—	—	2x2	2x2	2x2	2x2	2x2	3x3	—	—	—	
	Galvanized steel wire	No./Dia.	7/1.8	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	—	—	—	7/1.8	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	—	—	—	
		Sheath thickness	1.0	1.0	1.0	1.0	1.0	1.0	—	—	—	1.0	1.0	1.0	1.0	1.0	1.2	—	—	—	
	Outer dia. (Approx.)	(mm)	9x18	10.6x20	11.9x21	14x23	17.5x27	22.7x33	—	—	—	9.7x19	11.6x21	13x23	15.7x26	19.9x30	26.5x40	—	—	—	
	weight	(kg/m)	0.25	0.29	0.33	0.41	0.59	0.97	—	—	—	0.27	0.33	0.39	0.51	0.8	1.40	—	—	—	
Standard length (M)			500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
Copper wire dia. (mm)			0.65																		
pairs (P)			10	20	30	50	100	200	300	400	600										
insulation thickness (mm)			0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20										
LAP sheath thickness (mm)			1.7	1.7	1.7	1.7	1.8	2.0	2.2	2.3	2.6										
Overall dia. (Approx.)(mm)			11.5	14	16.1	19.3	25.5	34.5	40.6	46.3	56.1										
weight(kg/m)			0.16	0.28	0.36	0.54	1.00	1.85	2.76	3.80	5.40										
Self-support cable	web	(wide x height) (mm)	2x2	2x2	2x2	2x2	3x3	3x3	—	—	—										
	Galvanized steel wire	No./Dia.	7/1.8	7/1.8	7/1.8	7/2.0	7/2.3	7/2.3	—	—	—										
		Sheath thickness	1.0	1.0	1.0	1.0	1.2	1.2	—	—	—										
	Outer dia. (Approx.)	(mm)	11.5x21	14x24	16.1x26	19.3x29	25.5x38	34.5x48	—	—	—										
	weight	(kg/m)	0.32	0.42	0.51	0.73	1.26	2.22	—	—	—										
Standard length (M)			500	500	500	500	500	500	500	500	345										