


## Foam Skin Polyethylene Insulated STALPETH Sheathed Local Cable (FS-STP)

### Properties & application:

- ④ Foam-Skin, Star quad , STALPETH Sheathed local cable
- ④ Excellent transmission properties and easy to handy
- ④ Preventing from etching, excellent insulation resistant and water proofing

### Structure:

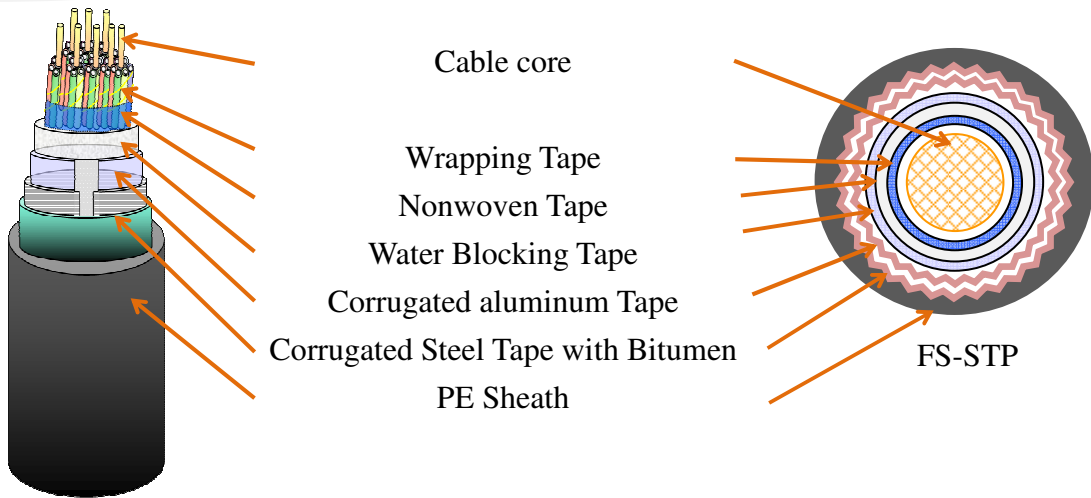

### Dimension:

Copper wire dia.	mm	0.4															0.9		
Pairs (P)	P	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	3200	400		
Insulation thickness	mm	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.21		
Cable core (Approx.)	mm	26	31	35	40	43	47	50	52	54	57	59	61	64	66	68	52		
PE sheath thickness	mm	1.5	1.6	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.5	2.6	2.7	2.8	3.0	2.3		
General cable (Approx.)	Dia.	mm	32	38	42	48	51	55	58	61	63	66	68	70	73	76	78	61	
	Weight	kg/m	1.57	2.20	2.81	3.40	4.08	4.69	5.29	5.88	6.47	7.06	7.56	8.24	8.83	9.45	10.06	6.19	
Corrugated Steel Tape Cable (Approx.)	Dia.	mm	42	47	55	60	64	67	71	73	75	78	80	82	86	88	90	73	
	Weight	kg/m	3.09	3.95	5.32	6.17	7.07	7.87	8.64	9.36	10.07	10.80	11.50	12.15	12.96	13.70	14.43	9.68	
Standard Length	mm	500	500	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	
Copper wire dia.	mm	0.5											0.65						
Pairs (P)	P	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	400	600	800	1000	1200	1400	
Insulation thickness	mm	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.15	0.15	0.15	0.15	
Cable core	mm	31	38	42	48	53	57	60	63	66	69	72	38	47	53	59	65	70	
PE sheath thickness	mm	1.6	1.8	1.9	2.1	2.3	2.5	2.5	2.6	2.8	3.0	3.0	1.8	2.1	2.3	2.5	2.8	3.0	
General cable (Approx.)	Dia.	mm	38	45	50	56	61	66	70	72	76	79	82	45	55	61	68	74	80
	Weight	kg/m	2.21	3.14	4.05	4.97	5.96	6.88	7.75	8.63	9.54	10.45	11.31	3.42	4.97	6.45	7.95	9.47	10.96
Corrugated Steel Tape Cable (Approx.)	Dia.	mm	48	57	62	68	73	78	82	85	88	91	94	58	67	73	80	86	92
	Weight	kg/m	3.96	5.77	6.94	8.19	9.46	10.60	11.68	12.72	13.79	14.89	15.86	6.09	8.16	9.97	11.83	13.64	15.50
Standard Length	mm	500	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250